

VARIABLE TEMPERATURE SOLDERING STATIONS



**New!**



- ESD Safe
- Variable temperature
- Temperature lock
- Lightweight & slim soldering iron
- Accurate heat sensing with compensation
- High Temperature for lead-free soldering

**SX-500D**  
Digital LED Display

ESD safe electronic temperature controlled soldering stations. Temperature can be varied from 392-968°F (200-520°C).

SX-500D: The 0.560" (14.2mm) three digit LED display accurately indicates the current tip temperature directly with a tolerance of 1 degree (displays in Fahrenheit).

These soldering stations incorporate a temperature lock to prevent unwanted temperature adjustments by the operator. The calibration port located on the front panel allows for quick and convenient fine tuning of the electronic temperature control system.

REPLACEMENT TIPS	
	<b>ST-511</b> Chisel Tip 3.0mm
	<b>ST-534</b> Chisel Tip 4.0mm
	<b>ST-503</b> Conical Tip 0.4mm, Long
	<b>ST-523</b> Conical Tip 0.4mm
	<b>ST-501</b> Conical Tip 0.8mm
	<b>ST-502</b> Screwdriver Tip 0.8mm
	<b>ST-506</b> Screwdriver Tip 1.2mm
	<b>ST-504</b> Screwdriver Tip 1.6mm
	<b>ST-505</b> Screwdriver Tip 3.2mm
	<b>ST-510</b> Screwdriver Tip 4.8mm
	<b>ST-530</b> SMD Tip 4.0mm



Now Higher Temperature for lead-free soldering!

**SX-500**


**OPTIONAL REPLACEMENT PARTS:**

MODEL	DESCRIPTION
<b>SX-500-T</b>	Replacement Iron
<b>STW-60</b>	Tweezer Iron for use with SMD devices

**ROSIN CORE SOLDER**

General purpose rosin core solder with fast wetting action, available in various diameters and roll sizes.

MODEL	DIAMETER	COMPOSITION	SIZE	PACKAGE
<b>SR-340</b>	0.75mm	60 Tin / 40 Lead	17g	Tube
<b>SRW6337060-0500</b>	0.60mm	63 Tin / 37 Lead	500g	Roll
<b>SRW6337080-0200</b>	0.80mm	63 Tin / 37 Lead	200g	Roll
<b>SRW6337080-0500</b>	0.80mm	63 Tin / 37 Lead	500g	Roll
<b>SRW6337100-0500</b>	1.00mm	63 Tin / 37 Lead	500g	Roll
<b>SRW6337120-0500</b>	1.20mm	63 Tin / 37 Lead	500g	Roll

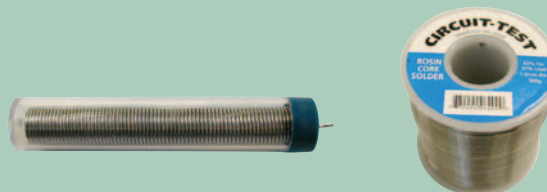

**LEAD FREE**

**New!**

MODEL	DIAMETER	COMPOSITION	SIZE	PACKAGE
<b>SR-350</b>	1.0mm	99.3 Tin / 0.7 Copper	12g	Tube
<b>SR-360</b>	1.0mm	96.5 Tin / 3 Silver / 0.5 Copper	12g	Tube
<b>SRW-LF-080-200</b>	0.8mm	99.3 Tin / 0.7 Copper	200g	Roll
<b>SRW-LFS-080-100</b>	0.8mm	96.5 Tin / 3 Silver / 0.5 Copper	100g	Roll

