


POWER SUPPLIES - MULTIPLE OUTPUT

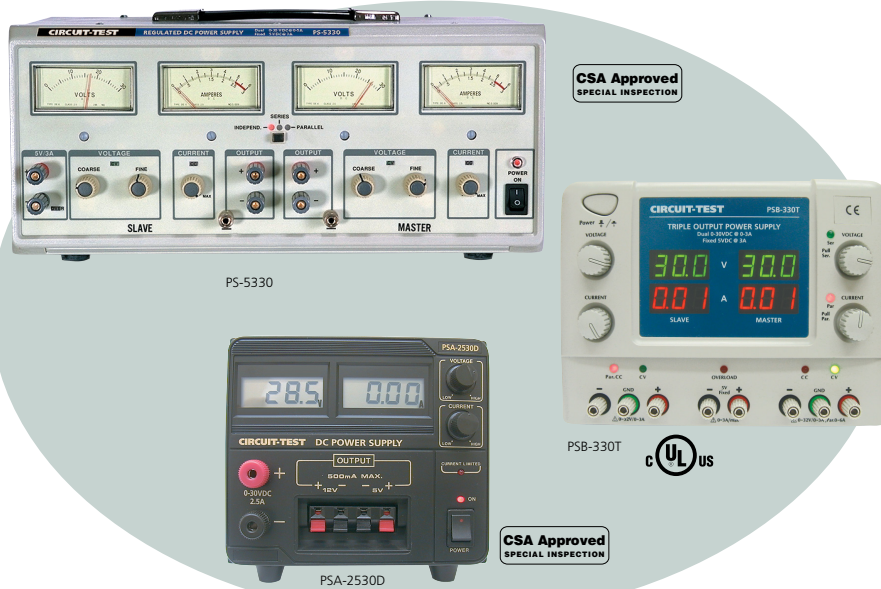

2 Variable / 1 Fixed Output

- Switchable Independent Series / Parallel Operation
- Two Variable 0-30VDC @ 3A or 5A
- Fixed 5VDC @ 3A
- Constant Voltage / Constant Current
- Coarse & Fine Adjustments (PS-3330, PS-5330)
- Voltage & Current Meters
- Two Year Warranty

PS-3330, PS-5330, PSB-330T

1 Variable / 2 Fixed Output

- Variable DC Output with current limiting
- Variable 0 - 30VDC @ 2.5A
- Fixed 12VDC @ 500mA
- Fixed 5VDC @ 500mA
- Dual LCD Meters
- Two Year Warranty

PSA-2530D

SPECIFICATIONS	PS-3330	PS-5330	PSA-2530D	PSB-330T
OUTPUT VOLTAGE	0-30, 0-30, 5VDC	0-30, 0-30, 5VDC	0-30, 5, 12VDC	0-30, 0-30, 5VDC
OUTPUT CURRENT	3, 3, 3A	5, 5, 3A	2.5, 500m, 500mA	3, 3, 3A
DISPLAY	Analog	Analog	Digital	Digital
LINE REGULATION	$\pm 0.025\%$ +2mV (10% Input Variation)	$\pm 0.025\%$ +2mV (10% Input Variation)	0.05% + 10mV	+/-0.01% +3mV
RIPPLE AND NOISE	0.5mV RMS (to 10KHz)	0.5mV RMS (to 10KHz)	5mV RMS	<0.3mV RMS
OUTPUT IMPEDANCE	0.2 (to 10KHz)	0.2 (to 10KHz)	-	-
POWER REQUIREMENTS	120VAC / 60Hz			

POWER SUPPLIES - SINGLE VARIABLE



- Constant Voltage / Constant Current
- Low noise and ripple
- Coarse & fine adjustments
- Voltage & Current meters
- Two year warranty

CSA Approved
SPECIAL INSPECTION

SPECIFICATIONS	PS-1030	PS-3030	PS-3030D	PS-5030	PS-5030D	PS-5060
OUTPUT VOLTAGE	0-30VDC	0-30VDC	0-30VDC	0-30VDC	0-30VDC	0-60VDC
OUTPUT CURRENT	10A	3A	3A	5A	5A	5A
DISPLAY	Analog	Analog	Digital	Analog	Digital	Analog
LINE REGULATION	$\pm 0.025\%$ +2mV (10% Input Variation)					
RIPPLE & NOISE	0.5mV RMS (to 10KHz)					
OUTPUT IMPEDANCE	0.2 (to 10KHz)					
POWER REQUIREMENTS	120VAC / 60Hz					