


## PCB TERMINAL BLOCKS




- PCB mount terminal block constructed of Nylon66 material
- Steel screws, tin-plated alloy contacts
- Interlocking, with 5.08mm (0.2") spaced leads
- Rated at 10A / 125VAC

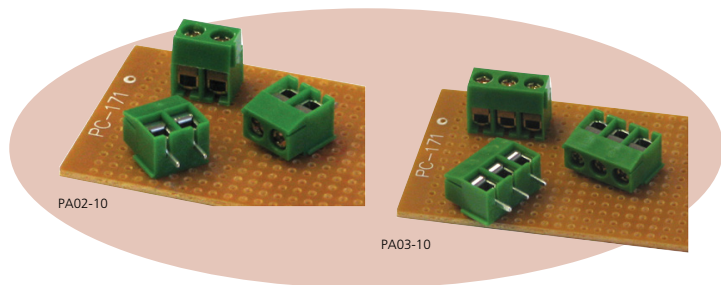

MODEL	TERMINALS	W x D x H	PKG QTY
PA02-10	2	10 x 8 x 11mm	10
PA02-100	2	10 x 8 x 11mm	100
PA03-10	3	15 x 8 x 11mm	10
PA03-100	3	15 x 8 x 11mm	100

## CLOSED END CRIMP CONNECTORS

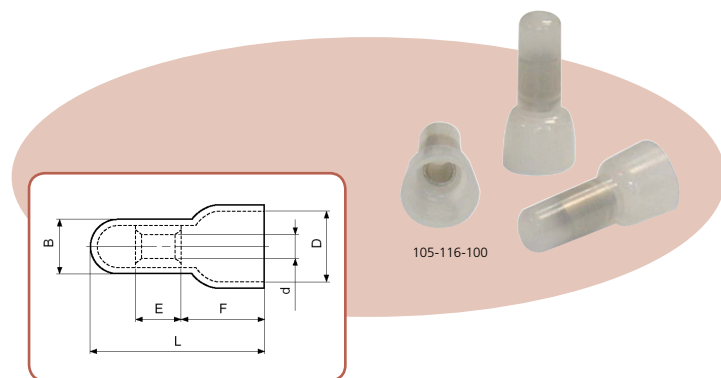


DIMENSIONS	L	F	E	ød	øB	øD
105-116-100	21.0mm	9.5mm	7.3mm	3.0mm	5.7mm	8.0mm
105-116-1000	(.827")	(.374")	(.287")	(.118")	(.224")	(.315")
105-122-100	20.8mm	9.5mm	7.0mm	2.4mm	5.0mm	6.5mm
105-122-1000	(.819")	(.374")	(.276")	(.094")	(.197")	(.256")

- Crimp type nylon insulated closed end wire connectors
- Rated to 300 Volts AC and 105°C
- Crimp tool model CT-310



MODEL	WIRE SIZE	PKG QTY
105-116-100	16-14 AWG	100
105-116-1000	16-14 AWG	1000
105-122-100	22-16 AWG	100
105-122-1000	22-16 AWG	1000

## PIEZO BUZZERS

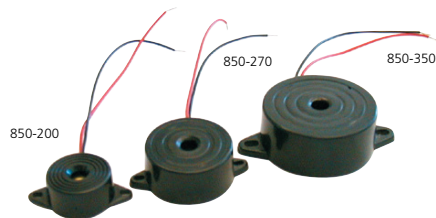

- Compact piezo electric buzzers with continuous tone
- Wire leads: 90mm long


MODEL	DESCRIPTION	DIMENSIONS	HOLE SPACING
850-200	3-28VDC 4.2KHz (80dB)	23mm dia x 13mm	30mm apart
850-270	3-28VDC 4.2KHz (95dB)	31mm dia x 16mm	35mm apart
850-350	3-28VDC 3.2KHz (85dB)	42mm dia x 20mm	50mm apart

## D-SUB CONNECTORS



### Female

MODEL	DESCRIPTION
DBF-09-10	D-Sub Female - 9 Pin Solder, Pkg/10
DBF-15-10	D-Sub Female - 15 Pin Solder, Pkg/10
DBF-15HD-10	D-Sub Female - 15 Pin Solder, High Density, Pkg/10
DBF-25-10	D-Sub Female - 25 Pin Solder, Pkg/10

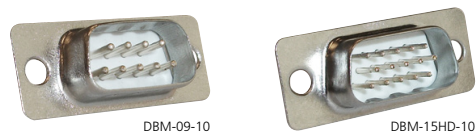

### Male

MODEL	DESCRIPTION
DBM-09-10	D-Sub Male - 9 Pin Solder, Pkg/10
DBM-15-10	D-Sub Male - 15 Pin Solder, Pkg/10
DBM-15HD-10	D-Sub Male - 15 Pin Solder, High Density, Pkg/10
DBM-25-10	D-Sub Male - 25 Pin Solder, Pkg/10

## D-Sub Covers

- Unshielded
- Grey ABS Plastic



MODEL	DESCRIPTION
MKD-K09P-10	D-Sub Cover - 9 Pin, Pkg/10
MKD-K15P-10	D-Sub Cover - 15 Pin, Pkg/10
MKD-K25P-10	D-Sub Cover - 25 Pin, Pkg/10